
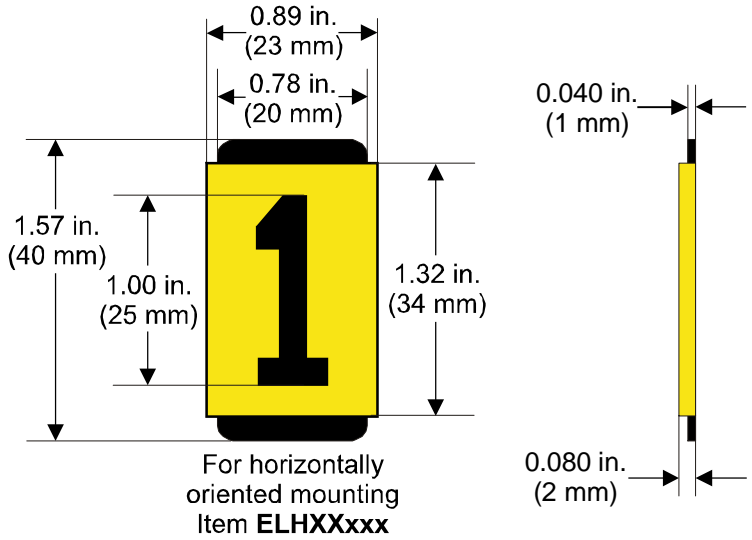


# Standard Size Identification Tags

## POLY TAGS TWO COLOR INJECTION MOLDED

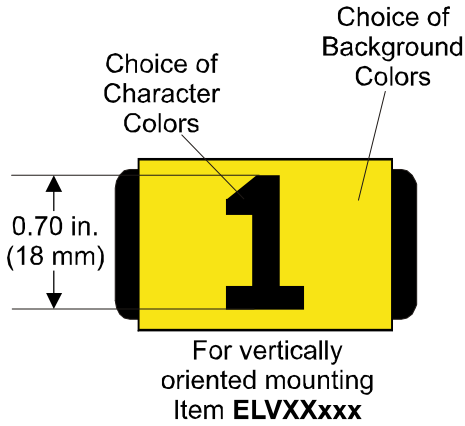

### First Shot

0.040 in. Thick Characters

### Second Shot Molding Process

Second shot resin locks with the first shot grid. Both background and characters have a minimum thickness of 0.040 inches.

### MATERIAL

High impact polypropylene with excellent cold impact resistance. UV stabilizers and antioxidants added to provide complete protection and weather resistance in all climates.

### ITEM CODES

**ELVXXxxx or ELHXXxxx**


- V= Vertically oriented mounting
- H= Horizontally oriented mounting
- Y= Yellow background (standard)
- O= Orange background (available)
- K= Black background (available)
- K= Black copy color (standard)
- W= White copy color (available)
- xxx=Copy code(see attached list)

SEE ATTACHED LIST FOR STOCK SYMBOLS AND WORDINGS

### SPECIFY AS

1.57 in. x 0.89 in. x 0.080 in. tags with injection molded characters integral with locking grids. Color additives and UV stabilizers molded throughout the tags. Both background and copy have a thickness of 0.040 inches.

## INSTALLATION GUIDELINES

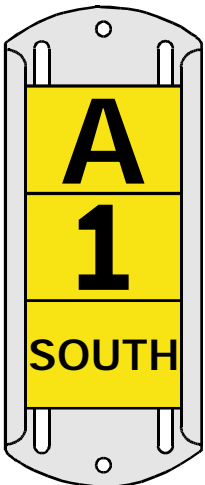

**ALUMINUM TAG HOLDER**  
**AH1xx** (xx=tag capacity)  
For marking poles, pedestals, switch cabinets, transformers, etc. both horizontally and vertically using nails, screws, rivets, or metal bands. Crimp channel ends to retain tags in holder. See Spec Sheet SPEC AH1

Vertically oriented AH103 (shown smaller than actual size)

**POLYETHYLENE TAG HOLDER**  
**PH1xx** (xx=tag capacity)

For marking underground cables, vaults, manholes, ducts, pipes, etc. using nylon tie straps. See Spec Sheet SPEC PH1



Horizontally oriented PH104 (shown smaller than actual size)



Tel: (800) 221-1311 or (718) 442-4900 or Fax: (718) 442-2124

e-mail: [team@techproducts.com](mailto:team@techproducts.com)

Visit us at: [www.techproducts.com](http://www.techproducts.com)

SPEC1EVL  
09/04